


MODEL AE60 AIR EXCHANGER



FEATURES

BLOWER:

- Centrifugal blower wheel recirculates 250 cfm of air from the dwelling and exchanges 80 cfm of air with the outside
- Permanently lubricated, 120 VAC, 60 Hz motor designed for continuous operation
- UL listed and CSA certified

HOUSING:

- Rugged steel housing with corrosion-resistant finish
- Suspension chains with springs provided to ensure quiet operation
- 4" round ports to outside ducts for easy connection
- 6" round ports to inside ducts for easy connection
- All inside surfaces covered with insulation
- Easily removable, washable air filters
- Built-in 3 foot power cord

CONTROLS:

- Off/Low/High speed switch on side of the unit
- Provision for 24 volt low voltage control

TYPICAL SPECIFICATIONS

The Air Exchanger shall be Broan-NuTone Model AE60.

Centrifugal blower wheel recirculates 250 cfm of air from the dwelling and exchanges 80 cfm of air with the outside, tempering the incoming air from outside.

Provisions for mounting the unit to the ceiling joists to be provided.

Unit shall include easily removable, washable air filters.

Unit to include a 3 foot built-in power cord.

The controls are to be mounted outside the unit and include an integral off/low/high switch, and provisions for low voltage controls.



Unit to accommodate 6" round, insulated duct.

Blower shall be designed for continuous operation using a permanently lubricated motor.

Unit to be UL listed and CSA certified.

PERFORMANCE RATINGS

Rated Air Flow - cfm	
Air exchange rate	80
Circulation rate	250
Max Area of Home - Sq. Ftg.	
0.30 AC/HR	1800
0.20 AC/HR	3000
Electrical Specifications	
Voltage	120 VAC
Watts	200
Amperage	3.0
Dimensions - Inches	
Height	12.25
Width	18.25
Depth	15.00
Net Weight - Lbs	40

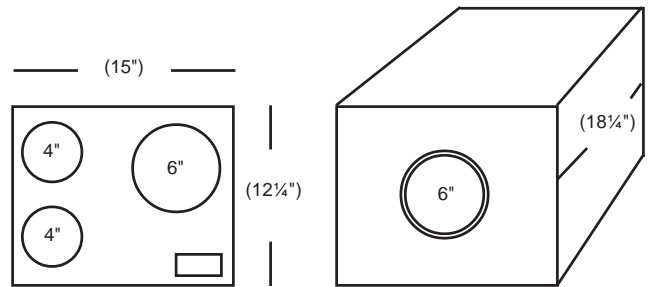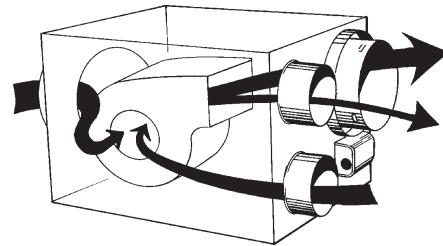

Broan-NuTone LLC, A Nortek Company, Hartford, Wisconsin 53027

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date