


BROAN[®] NuTone[®]

Add LED lighting to your bath fan with an easy-to-install grille upgrade kit.

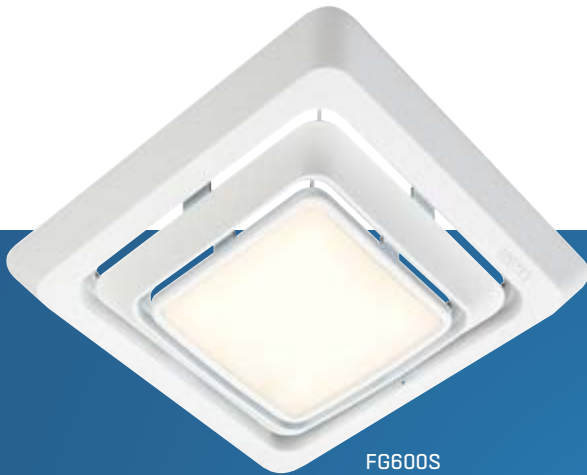

FG600S

In just 5 minutes you can add LED lighting to your bathroom.



Easily convert a non-lighted fan to a fan-light. Effective LED task lighting (equivalent 60W).



Stays cleaner longer. Fewer vent slots to clean, low-profile, streamlined design.



Fastest bath fan upgrade—5 minute, no cut, quick connect install.

NO CUT
5MIN
INSTALL

Hides existing dry wall cuts—no cutting or professional installation required.

Compatible with these Broan fan models:

If your grille looks like this	Compatible with these models*
	Broan: 576, 670, 671, 674, 676, 678, 679, 680, 683, 684, 688, 689, 770, 771, 784, 679L, 683L, E050, E070, HD50, HD50L, HD80, HD80L
	Existing fan housing sizes
	7½" x 7¼" and 8" x 8¼"

Compatible with these NuTone fan models:

If your grille looks like this	Compatible with these models*
	NuTone: 695, 763, 6950, 50NT, 684NT, 696N, 696NO, 763N, 80NT, HD50LNT, HD50NT, HD80LNT, HD80NT
	Existing fan housing sizes
	7½" x 7¼" and 8" x 8¼"

*No other usage has been tested and authorized by Broan-NuTone LLC. For ceiling mount applications only. Visit Broan.com or NuTone.com for all compatible models.



Remove the old grille and unplug the motor.




Choose grille springs matched to your fan model. **Left:** Factory-installed grille springs for fan models: 688, 671, 678 and 771. **Right:** Replace factory-installed grille springs with larger springs for fan models: 770, 676, 679 and 683.



Attach the grille to the fan housing with one grille spring. Plug the motor into the pass-through plug and the pass-through plug into the fan receptacle.



Attach the second grille spring to the fan and push the grille assembly against ceiling. You're done!



Watch the installation video youtu.be/w76SIbBLMYQ

Easy installation steps:

Broan.com

Broan, 926 W. State Street, Hartford, WI 53027 **800-558-1711**